

TRACTO

More information
on GRUNDOMAT XS

[TRACTO.COM/EN/GRUNDOMAT-XS](https://tracto.com/en/grundomat-xs)



GRUNDOMAT XS SOIL DISPLACEMENT HAMMER



**Compact design
for small excavation pits**

ADVANCED TRENCHLESS TECHNOLOGY

SMALLER EXCAVATION PITS. LESS EFFORT.

The GRUNDOMAT XS expands the GRUNDOMAT P+ generation by adding a compact solution for short trenchless installations where space is limited.

Some pipe crossing projects require specialised solutions. Particularly for house connections or when working in confined urban areas, excavation pits that are as small as possible offer a decisive economic advantage. The particularly compact design of the GRUNDOMAT XS allows for smaller start and target pits, meaning trenchless installation can be carried out even where it was previously impossible due to limited space. It thus expands the range of applications for the GRUNDOMAT P+ generation – resulting in more efficient site management and reduced effort.

YOUR BENEFITS AT A GLANCE

Smaller excavation pits

Reduced space requirements and less disruption to the surface.

Less effort

Less excavation, lower restoration costs and faster site preparation and clean-up.

Designed for short distances

Ideal for house connections, crossings and work in confined urban environments.

Part of the new GRUNDOMAT P+ generation

Tried-and-tested platform, interchangeable heads and cost-effective servicing.


Typical applications

- House connections
- Work in confined urban areas
- Short pipe and road crossings

A compact machine. A big difference.

The GRUNDOMAT XS complements the new GRUNDOMAT P+ generation as a specialist for short installation distances – wherever smaller excavation pits make all the difference.

APPLICATION

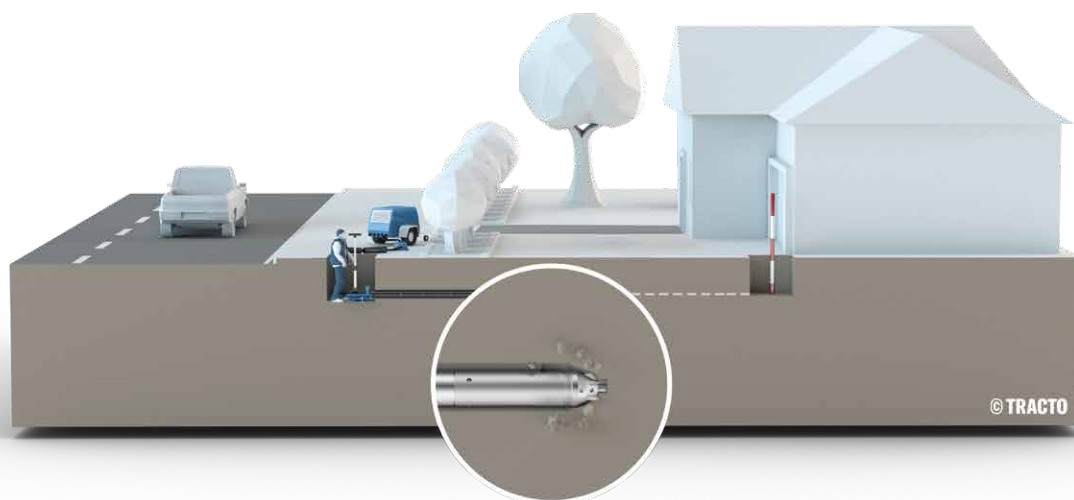

Application example fibre optics expansion FTTX

GRUNDOMAT XS

TECHNICAL DATA

TYP	55	75	95
Diameter (mm)	55	75	95
Length (mm)	807	805	1130
Weight (kg)	12	21	42
Max. operating pressure (bar)	7	7	7
Air consumption (m ³ /min)	0.55	1.1	1.55
No. of strokes (min ⁻¹)	800	750	495
Max. pipe diameter D _a no expansion (mm)	45	63	85
Sound power level L _{WA} (dB)	107	109	110

Subject to change.



GRUNDOMAT P+ 75



GRUNDOMAT XS 75

A direct size comparison between the GRUNDOMAT P+ 75 and the more compact GRUNDOMAT XS 75.




GRUNDOMAT XS in practice: Its compact design and low weight make it easy to handle, particularly in confined spaces.

TRACTO-TECHNIK GMBH & CO. KG HEADQUARTERS

PAUL-SCHMIDT-STRASSE 2
57368 LENNESTADT, GERMANY
T +49 2723 808-0
F +49 2723 808-180
INFO@TRACTO.COM
TRACTO.COM/EN



TRACTO.COM

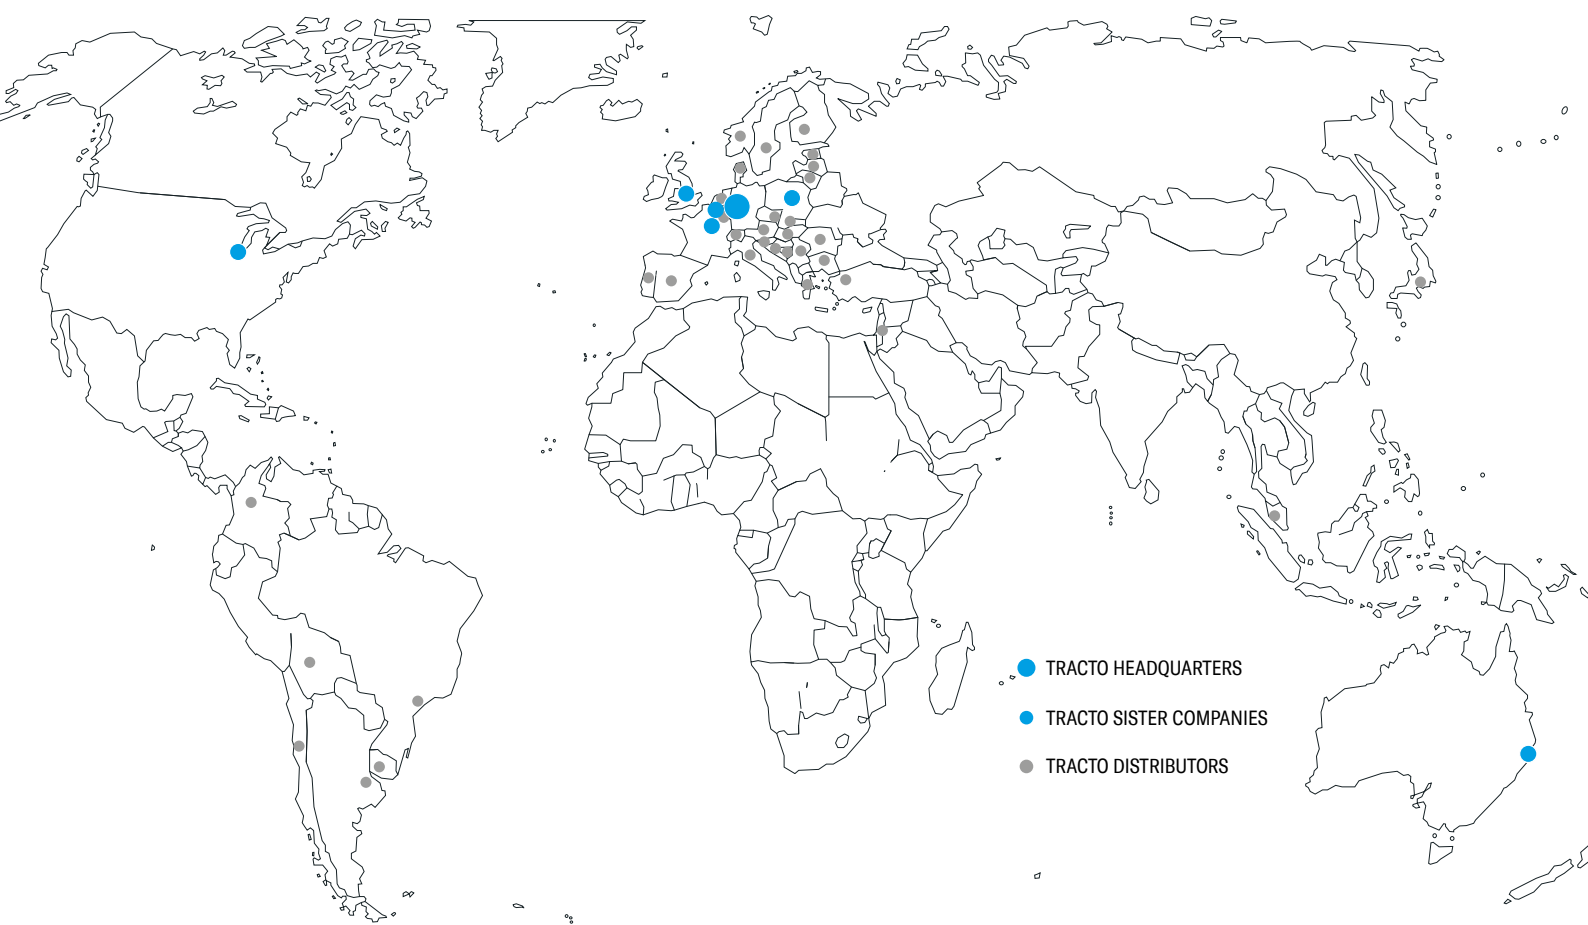

- TRACTO HEADQUARTERS
- TRACTO SISTER COMPANIES
- TRACTO DISTRIBUTORS

BENELUX
TRACTO-TECHNIK BENELUX
MOESTOEMAATHEIDE 16A
2260 WESTERLO
T +32 498 66 60 74
BENELUX@TRACTO.COM
TRACTO.COM/BE

UNITED KINGDOM
TRACTO-TECHNIK UK LTD
10 WINDSOR ROAD
BEDFORD MK 42 9SU
T +44 1234 342566
F +44 1234 352184
SALES.UK@TRACTO.COM
TRACTO.COM/UK

FRANCE
TRACTO-TECHNIK FRANCE S.A.R.L.
1/3 RUE DE LA PRAIRIE
F-77700 BAILLY ROMAUVILLIERS
T +33 1 60 42 49 40
F +33 1 60 42 49 43
FR@TRACTO.COM
TRACTO.COM/FR

USA
TT TECHNOLOGIES INC.
2020 EAST NEW YORK STREET
AURORA, IL. 60502
T +1 630 851 8200
F +1 630 851 8299
INFO@TTTECHNOLOGIES.COM
TTTECHNOLOGIES.COM

AUSTRALIA
TRACTO-TECHNIK AUSTRALIA PTY LTD.
10 ALICIAJAY CIRCUIT
LUSCOMBE, QLD 4207
T +61 73420 5455
AU@TRACTO.COM
TRACTO.COM/AU

TRACTO ADVANCED TRENCHLESS TECHNOLOGY

TRACTO PARTNER:

Images, text and graphics subject to change. Some of the product or service designations listed below as well as depicted logos are registered trademarks of TRACTO and in these cases are subject to the respective applicable trademark law.